


---

**Type: ASK/OOK Super-Heterodyne Receiver Module****Model: CY61-V3.0**

---

**Description:**

CY61-V3.0 is an ASK/OOK receiver super-heterodyne module is designed specifically for remote-control and wireless security receiver operating at 315/433.92MHz in ISM frequency band. It has high receiving sensitivity and low price. Any circuit that can be done without additional wireless signal input to the data signal output. Users only need to add simple data decoding circuit and it can easily achieve the development of wireless products.

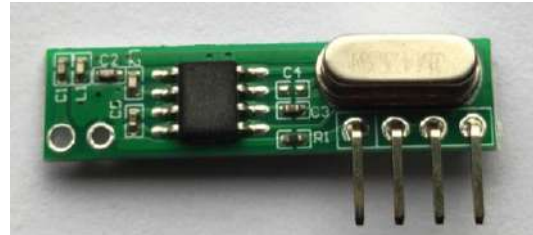**Order Information:**

Model NO.	Frequency
CY61-V3.0-315	315 MHz
CY61-V3.0-433.92	433.92 MHz

**Features:**

- Receiving Sensitivity: -115dBm
  - Frequency: 315M/433.92MHz (customized frequency is available)
  - Low cost ASK radio super-heterodyne receiver
  - Supply voltage: 3.6~5.5V
  - Low Power consumption, 5.0V@315Mhz, 5.3mA. 5.0V@433.92Mhz, 5.3mA. The continuously data transmission data rate can reach 2.4K, when it's in energy saving mode, the consumption can be as low as 50nA.
  - Good selectivity and stray radiation inhibition ability, it's easy to go through the CE/FCC international certification approval.
  - Good capable of suppressing the vibration radiation, can work with multiple receiving module (such as one transmitter with multiple receivers) and they do not interfere with each other and there is no affection over the receiving distance.
  - Operation temperature: -20°C ~70°C
  - Compatible with most (ASK/OOK) transmitters
  - Size: 30\*7.7\*5mm
-

## Application

- Automotive (RKE)
- Garage Door, Barrier, Roller shutter and gate openers
- Smart home system
- Wireless Door Bell
- Remote controls
- Wireless Controller
- Alarm and security system
- Wireless data transmission

## Pin Description

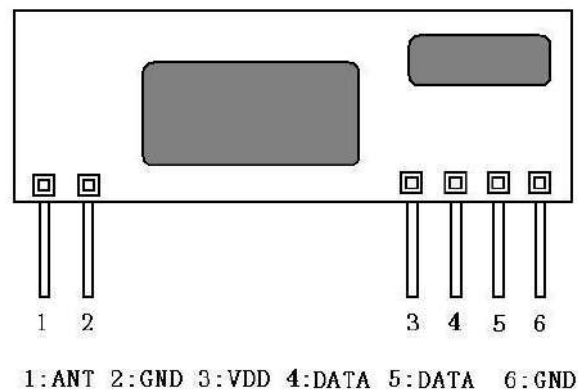


Figure1 CY61-V3.0 Shape & Pins

Please note: CY61-V3.0 is come with standard 4 PINs (without the red colored pins). Please notify us if you would like 6 PINs.

Pin	Name	Pin Definition
1	ANT	RF signal input pin
2	GND	Connect to negative power supply
3	VDD	Connect to positive power supply
4	VDD	Connect to positive power supply
5	DATA	Data output pin
6	GND	Connect to negative power supply

Note: ANT pin is a 50 ohm antenna input. The length is about:  
 23cm for 315MHz  
 17cm for 433.92MHz

### Electrical Characteristics:

Condition: Ta=25°C Vcc=5.0V Frequency=315MHz

Parameter	Specification			Unit	Condition
	Min	Typ.	Max		
Frequency range	314.90	315	315.10	MHz	
Modulation	ASK				
Receiver sensitivity		-115		dBm	50Ohm Antenna direct input/1K Kbps
Receiver Bandwidth		200		KHz	
Receiver On time			12	ms	
Working Voltage	1.8	5.0	5.5	V	
Working Current	4.5	5.3	6.0	mA	
Highest Output Voltage when Decoding	1.8		5.5	V	RL=500K
Lowest Output Voltage when Decoding			0.5	V	
Working Temperature	-20		+70	°C	

Condition: Ta=25°C Vcc=5.0V Frequency=433.92MHz

Parameter	Specification			Unit	Condition
	Min	Typ.	Max		
Frequency range	433.82	433.92	434.02	MHz	
Modulation	ASK				
Receiver sensitivity		-115		dBm	50Ohm Antenna direct input/1K Kbps
Receiver Bandwidth		200		KHz	
Receiver On time			12	ms	
Working Voltage	1.8	5.0	5.5	V	

Working Current	4.5	5.3	6.0	mA	
Highest Output Voltage when Decoding	1.8		5.5	V	RL=500K
Lowest Output Voltage when Decoding			0.5	V	
Working Temperature	-20		+70	°C	

### Mechanical Size: (Unit: MM)

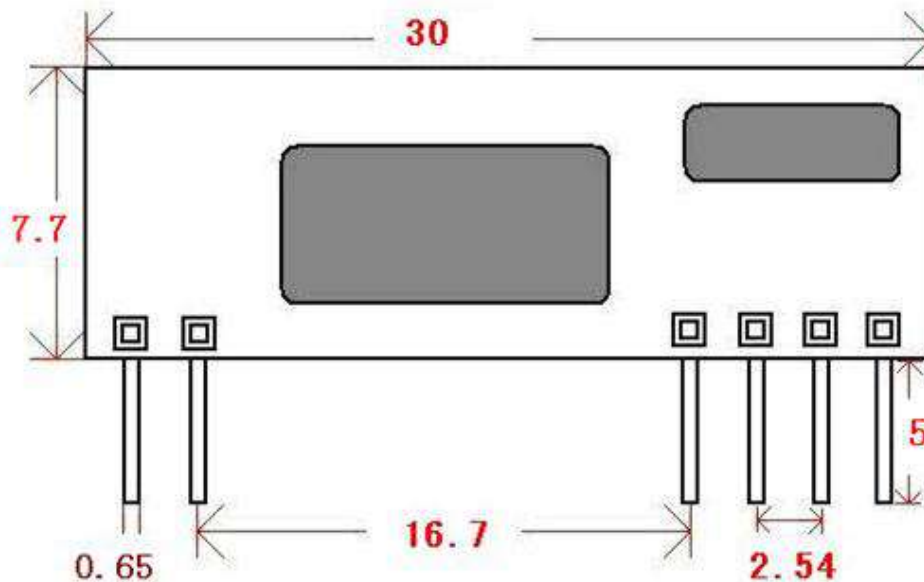


Figure2 CY61-V3.0 Dimension

### PRE-CAUTION:

The driven current of CY61-V3.0 data output pin is weak, so if direct the single chip microcomputer, please don't add any pull up or pull down resistors on the MCU' I/O port. The MCU internal pull-up and pull down resistors need to be in disabled state too.

PCB dimension has tolerance of 3%.

