

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	


SINGLE ROW
N:NUMBER OF CONTACTS
A/B:CUSTOMER LENGTH AVAILABLE

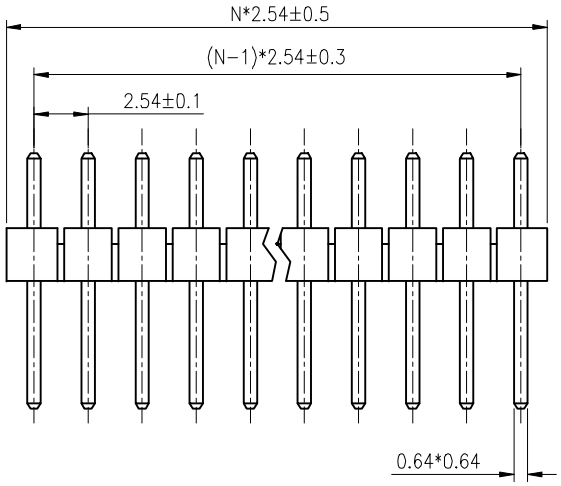



NOTES:

1. ELECTRICAL CHARACTERISTICS:
   1.1 CONTACT RESISTANCE: 20mΩ Max.
   1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
   1.3 INSULATION RESISTANCE: 1000MΩ Min.
2. ENVIRONMENT CHARACTERISTICS:
   2.1 TEMPERATURE: −40°C~+105°C.



RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

ITEM	PART NAME	PART NO.	MATERILAS	FINISHED
2	CONTACT		COPPER ALLOY	GOLD OR TIN PLATED
1	HOUSING		THERMOPLASTIC	UL 94 V-0

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION		TITLE	2.54mm 1*40Pin Header S/T Type
UNITS	mm		
SHEET SIZE	A4	SERIES	LL1009-1A