


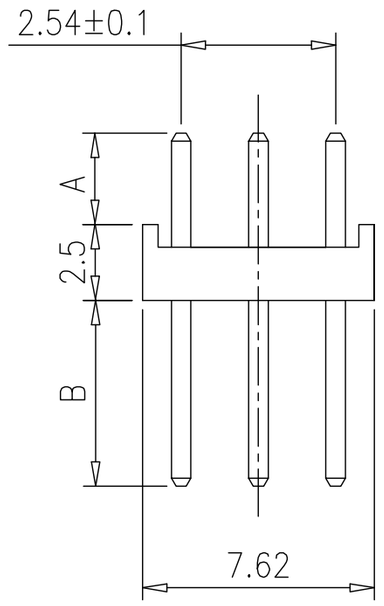


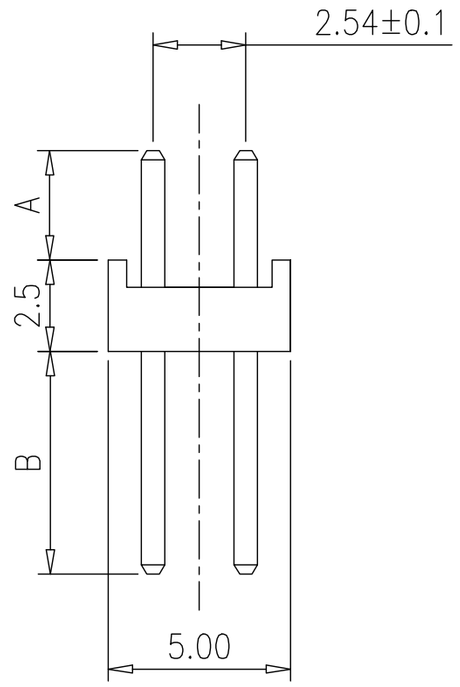

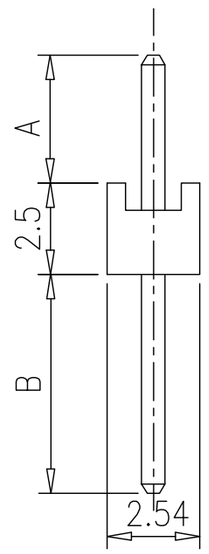

N:NUMBER OF CONTACTS

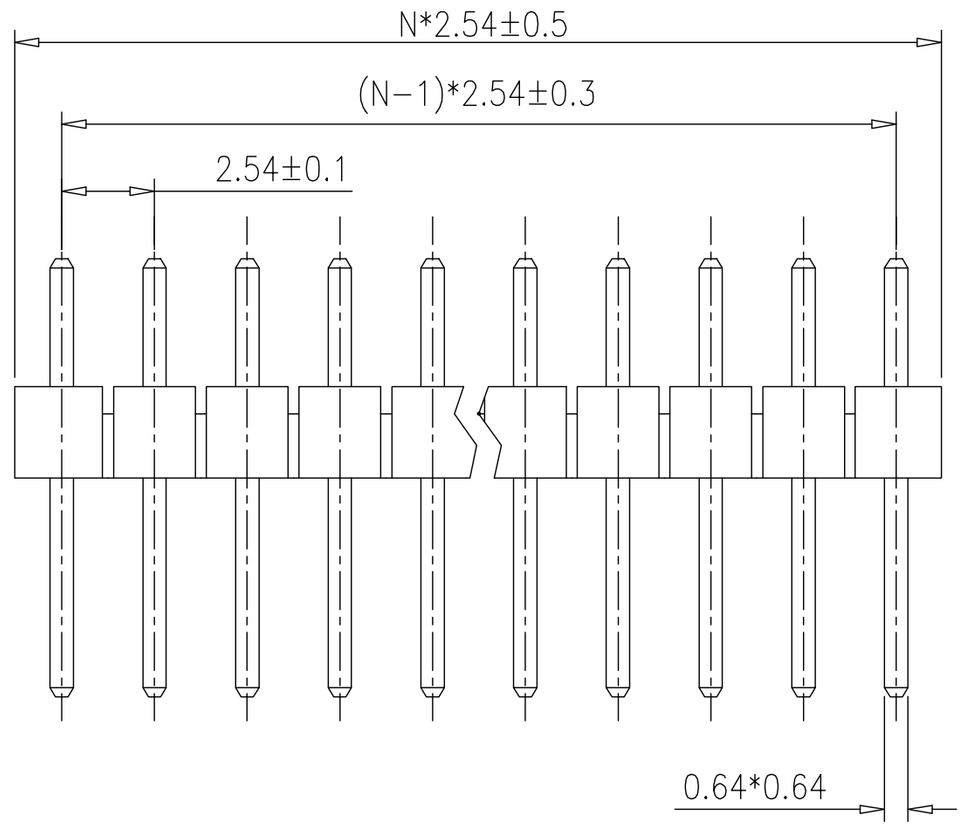

NOTES:

1. ELECTRICAL CHARACTERISTICS:
   - 1.1 CONTACT RESISTANCE: 20mΩ Max.
   - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
   - 1.3 INSULATION RESISTANCE: 1000MΩ Min.
2. ENVIRONMENT CHARACTERISTICS:
   - 2.1 TEMPERATURE: −40°C~+105°C.

ORDER INFORMATION

Z	B	1	0	0	3	−	X	X	X	X	X	−	X

- SERIES NO
- No. OF CONTACTS: 1×1~1×40; 2×2~2×40; 3×3~3×40
- MOUNTING TYPE: V: V/T TYPE
- CONTACT PLATING: 1: FULL GOLD; 2: FULL NICKEL; 3: FULL TIN
- PLATING LEVEL (FOR GOLD ONLY): A: LEVEL A; B: LEVEL B; C: LEVEL C
- PIN DIM TYPE: A3.0/B6.1; A3.5/B17.0

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE
DWG	SK	DATE	2018-5-25	SIZE	A4	UNITS	1/1
CHIK		DATE		UINTS	MM	SCALE	
APP		DATE					

ZHONGB

NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLGY CO.LTD

DWGNO

ZB1003-XXP-V

2.54mm PIN HEADER V/T TYPE