

## FEATURES

Maximum Output current  $I_O$ : 0.1 A


Output voltage  $V_O$ : 5 V

Continuous total dissipation  $P_D$ : 0.5W ( $T_a=25^\circ\text{C}$ )

## ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies)

| Parameter                            | Symbol    | Value   | Unit             |
|--------------------------------------|-----------|---------|------------------|
| Input Voltage                        | $V_I$     | 30      | V                |
| Operating Junction Temperature Range | $T_{OPR}$ | 0-125   | $^\circ\text{C}$ |
| Storage Temperature Range            | $T_{STG}$ | -65-150 | $^\circ\text{C}$ |

## 78L05

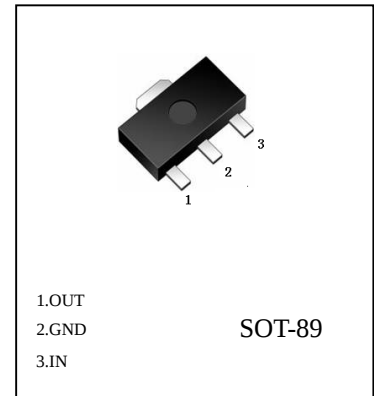

## ELECTRICAL CHARACTERISTICS ( $V_i=10\text{V}$ , $I_o=40\text{mA}$ , $C_i=0.33\mu\text{F}$ , $C_o=0.1\mu\text{F}$ , unless otherwise specified )

| Parameter                | Symbol       | Test conditions                                                          | Min  | Typ | Max  | Unit          |
|--------------------------|--------------|--------------------------------------------------------------------------|------|-----|------|---------------|
| Output voltage           | $V_o$        | $25^\circ\text{C}$                                                       | 4.8  | 5.0 | 5.2  | V             |
|                          |              | $7\text{V} \leq V_i \leq 20\text{V}$ , $I_o=1\text{mA} \sim 40\text{mA}$ | 4.75 | 5.0 | 5.25 | V             |
|                          |              | $I_o=1\text{mA} \sim 70\text{mA}$                                        | 4.75 | 5.0 | 5.25 | V             |
| Load Regulation          | $\Delta V_o$ | $I_o=1\text{mA} \sim 100\text{mA}$                                       |      | 15  | 60   | mV            |
|                          |              | $I_o=1\text{mA} \sim 40\text{mA}$                                        |      | 8   | 30   | mV            |
| Line regulation          | $\Delta V_o$ | $7\text{V} \leq V_i \leq 20\text{V}$                                     |      | 32  | 150  | mV            |
|                          |              | $8\text{V} \leq V_i \leq 20\text{V}$                                     |      | 26  | 100  | mV            |
| Quiescent Current        | $I_q$        | $25^\circ\text{C}$                                                       |      | 3.8 | 6    | mA            |
| Quiescent Current Change | $\Delta I_q$ | $8\text{V} \leq V_i \leq 20\text{V}$                                     |      |     | 1.5  | mA            |
|                          | $\Delta I_q$ | $1\text{mA} \leq I_o \leq 40\text{mA}$                                   |      |     | 0.1  | mA            |
| Output Noise Voltage     | $V_N$        | $10\text{Hz} \leq f \leq 100\text{KHz}$                                  |      | 42  |      | $\mu\text{V}$ |
| Ripple Rejection         | RR           | $8\text{V} \leq V_i \leq 20\text{V}$ , $f=120\text{Hz}$                  | 41   | 49  |      | dB            |
| Dropout Voltage          | $V_d$        | $25^\circ\text{C}$                                                       |      | 1.7 |      | V             |

## 78L05 Typical Performance Characteristics

