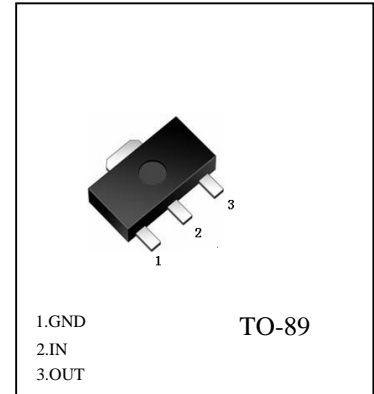


**FEATURES**

 Maximum Output current  $I_O$ : 0.1 A

 Output voltage  $V_O$ : -5V

 Continuous total dissipation  $P_D$ : 0.5 W ( $T_a = 25^\circ\text{C}$ )

**79L05**

**ABSOLUTE MAXIMUM RATINGS** (Operating temperature range applies)

Parameter	Symbol	Value	Unit
Input Voltage	$V_I$	-30	V
Operating Junction Temperature Range	$T_{OPR}$	0-125	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65-150	$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS** ( $V_I = -10\text{V}, I_o = 40\text{mA}, C_i = 0.33\mu\text{F}, C_o = 0.1\mu\text{F}$ , unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT	
Output voltage	$V_o$	$25^\circ\text{C}$	-4.8	-5.0	-5.2	V	
		0-125 $^\circ\text{C}$	$-7\text{V} \leq V_i \leq -20\text{V}, I_o = 1\text{mA} \sim 40\text{mA}$	-4.75	-5.0	-5.25	V
			$I_o = 1\text{mA} \sim 70\text{mA}$	-4.75	-5.0	-5.25	V
Load Regulation	$\Delta V_o$	$I_o = 1\text{mA} \sim 100\text{mA}$ $25^\circ\text{C}$		20	60	mV	
		$I_o = 1\text{mA} \sim 40\text{mA}$ $25^\circ\text{C}$		10	30	mV	
Line regulation	$\Delta V_o$	$-7\text{V} \leq V_i \leq -20\text{V}$ $25^\circ\text{C}$		15	150	mV	
		$-8\text{V} \leq V_i \leq -20\text{V}$ $25^\circ\text{C}$		12	100	mV	
Quiescent Current	$I_q$	$25^\circ\text{C}$			6	mA	
Quiescent Current Change	$\Delta I_q$	$-8\text{V} \leq V_i \leq -20\text{V}$ 0-125 $^\circ\text{C}$			1.5	mA	
	$\Delta I_q$	$1\text{mA} \leq V_i \leq 40\text{mA}$ 0-125 $^\circ\text{C}$			0.1	mA	
Output Noise Voltage	$V_N$	$10\text{Hz} \leq f \leq 100\text{KHz}$ $25^\circ\text{C}$		40		$\mu\text{V}$	
Ripple Rejection	RR	$-8\text{V} \leq V_i \leq -18\text{V}, f = 120\text{Hz}$ 0-125 $^\circ\text{C}$	41	49		dB	
Dropout Voltage	$V_d$	$25^\circ\text{C}$		1.7		V	

**79L05 Typical Performance Characteristics**

