




MMBT3904

NPN EPITAXIAL SILICON TRANSISTOR

GENERAL PURPOSE APPLICATION

FEATURES

- * Collector-Emitter Voltage: $V_{CE0}=40V$
- * Complementary to UTC MMBT3906

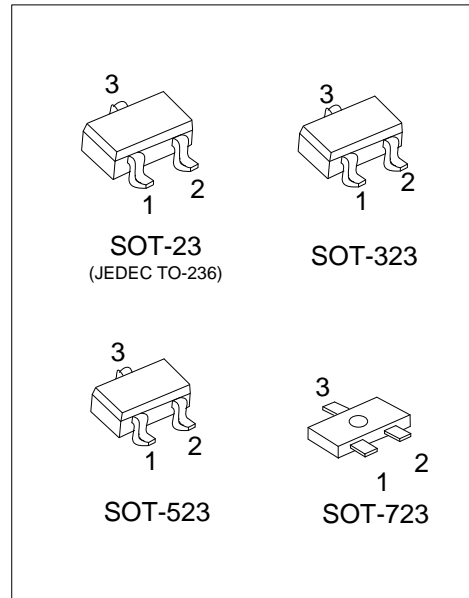


ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
MMBT3904L-AE3-R	MMBT3904G-AE3-R	SOT-23	B	E	C	Tape Reel
MMBT3904L-AL3-R	MMBT3904G-AL3-R	SOT-323	B	E	C	Tape Reel
MMBT3904L-AN3-R	MMBT3904G-AN3-R	SOT-523	B	E	C	Tape Reel
MMBT3904L-AQ3-R	MMBT3904G-AQ3-R	SOT-723	B	E	C	Tape Reel

Note: Pin Assignment: B: Base E: Emitter C: Collector

<p>MMBT3904G-AE3-R</p> <p>(1) Packing Type (2) Package Type (3) Green Package</p>	<p>(1) R: Tape Reel (2) AE3: SOT-23, AL3: SOT-323, AN3: SOT-523 AQ3: SOT-723 (3) G: Halogen Free and Lead Free, L: Lead Free</p>
---	--

MARKING

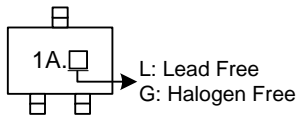

MMBT3904

NPN EPITAXIAL SILICON TRANSISTOR

■ ABSOLUTE MAXIMUM RATING (T_A=25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Base Voltage		V _{CBO}	60	V
Collector-Emitter Voltage		V _{CEO}	40	V
Emitter-Base Voltage		V _{EBO}	6	V
Collector Current		I _C	200	mA
Collector Dissipation	SOT-23	P _C	0.35	W
	SOT-323		0.3	W
	SOT-523		0.27	W
	SOT-723		0.13	W
Junction Temperature		T _J	+150	°C
Storage Temperature		T _{STG}	-55 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL CHARACTERISTICS

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT-23	θ _{JA}	360	°C/W
	SOT-323		420	°C/W
	SOT-523		450	°C/W
	SOT-723		470	°C/W





Note: The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.

■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	V _{CBO}	I _C =10μA, I _E =0	60			V
Collector-Emitter Breakdown Voltage	V _{CEO}	I _C =1mA, I _B =0 (Note)	40			V
Emitter-Base Breakdown Voltage	V _{EBO}	I _E =10μA, I _C =0	6			V
Collector-Emitter Saturation Voltage (Note)	V _{CE(SAT)1}	I _C =10mA, I _B =1mA			0.2	V
	V _{CE(SAT)2}	I _C =50mA, I _B =5mA			0.3	V
Base-Emitter Saturation Voltage (Note)	V _{BE(SAT)1}	I _C =10mA, I _B =1mA	0.65		0.85	V
	V _{BE(SAT)2}	I _C =50mA, I _B =5mA			0.95	V
Collector Cut-Off Current	I _{CEX}	V _{CE} =30V, V _{EB} =3V			50	nA
Base Cut-Off Current	I _{BL}	V _{CE} =30V, V _{EB} =3V			50	nA
DC Current Gain (Note)	h _{FE1}	V _{CE} =1V, I _C =0.1mA	40			
	h _{FE2}	V _{CE} =1V, I _C =1mA	70			
	h _{FE3}	V _{CE} =1V, I _C =10mA	100		300	
	h _{FE4}	V _{CE} =1V, I _C =50mA	60			
	h _{FE5}	V _{CE} =1V, I _C =100mA	30			
Current Gain Bandwidth Product	f _T	V _{CE} =20V, I _C =10mA, f=100MHz	300			MHz
Output Capacitance	C _{OB}	V _{CB} =5V, I _E =0, f=1MHz			4	pF
Turn On Time	t _{ON}	V _{CC} =3V, V _{BE} =0.5V, I _C =10mA, I _{B1} =1mA			70	ns
Turn Off Time	t _{OFF}	I _{B1} =1B2=1mA			250	ns

Note: Pulse test: P_W ≤ 300μs, Duty Cycle ≤ 2%.

■ TYPICAL CHARACTERISTICS

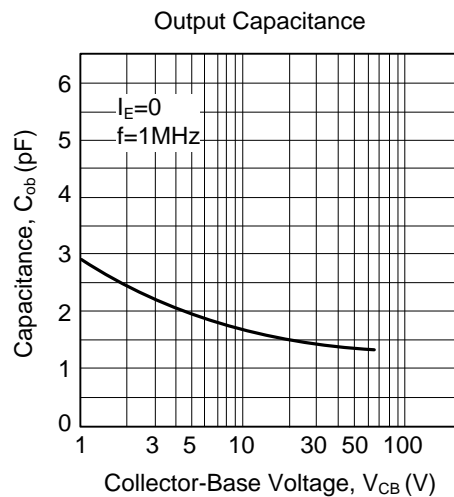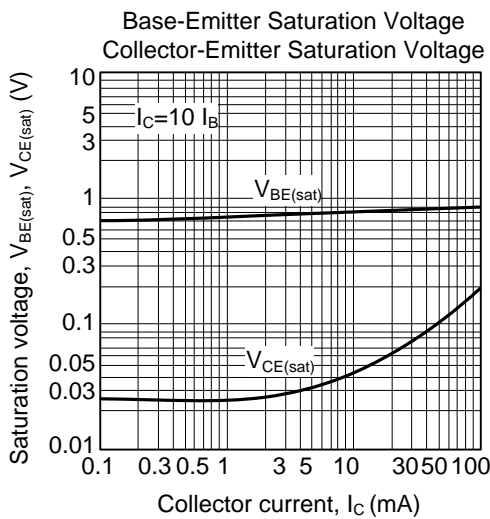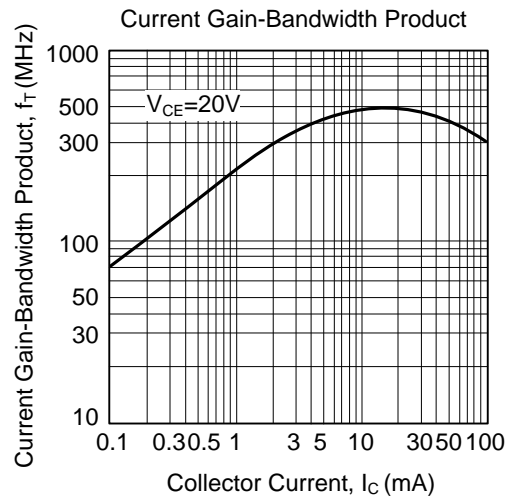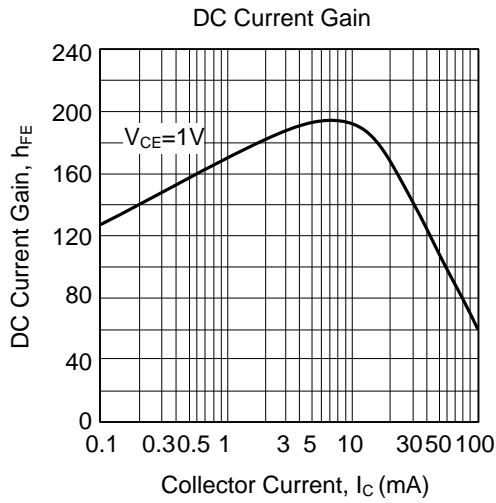

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.