

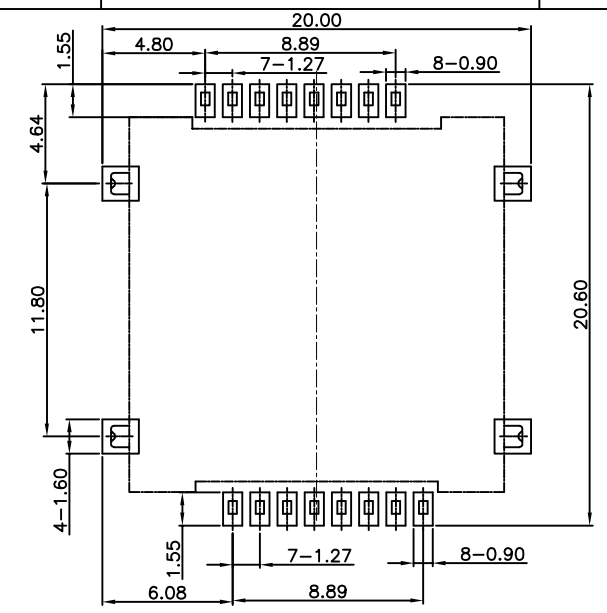
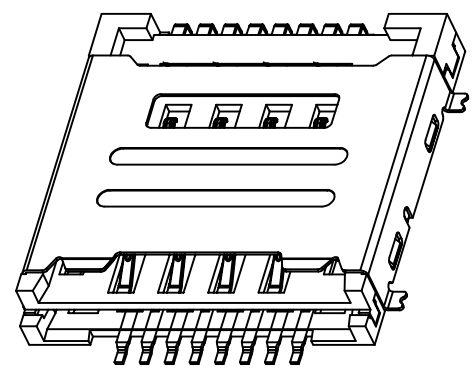



REV	DATE	MODIFICATION	APPROVER
A	20170829	NEW	LiuDan

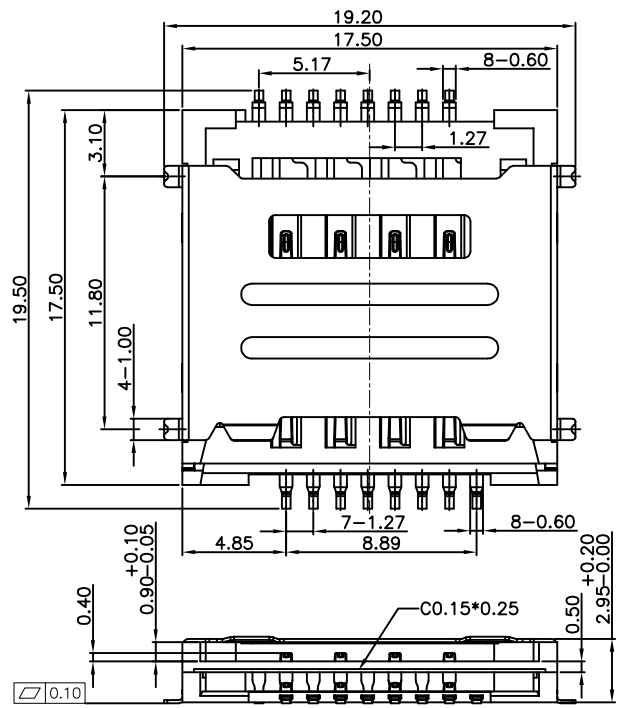

RECOMMENDED PC BOARD LAYOUT
TOLFRANCF: +0.05[TOP VIFW]

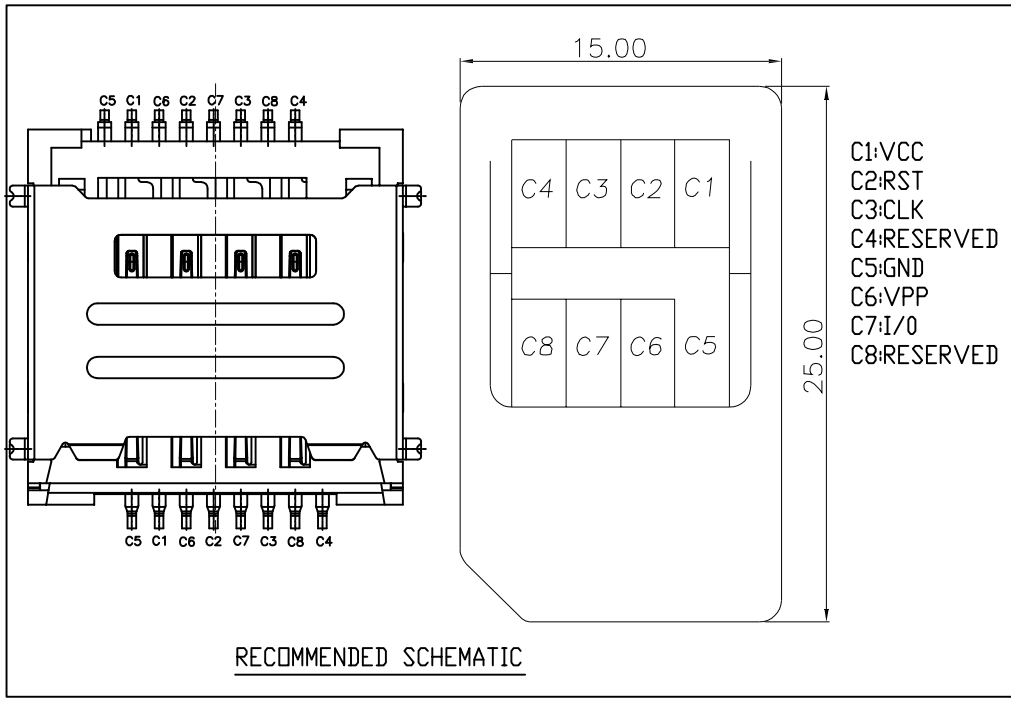

NOTE:
1.MATERIAL:
HOUSING:LCP BLACK UL94V-0
CONTACT:COPPER ALLOY(C5210)
SHELL:SUS304
2.PLATED
CONTACT AREA GOLD FLASH PLATED OVER NI
SOLDER TAIL 100u*MIN SN PLATED OVER NI
NICKEL 30u*PLATED OVER ALL
SHELL:NICKEL 30u*PLATED OVER ALL,GOLD
FLASH PLATED ON SOLDER AREA
3.SPECIFICATION NOTES:
CONTACT RESISTANCE:100 milliohms MAX
CURRENT RATING:0.5A
VOLTAGE RATING:250V
DIELECTRIC WITHSTANDING VOLTAGE:500V AC
Operating Temperature: -40°C~+85°C

GENERAL TOLERANCE		UNITS	NAME:	
SELECT	✓	mm	DUAL SIM CARD 8P	
DN.	TOL 1 2 3	MAT'L	PART NO:	
X.XXX	±0.10±0.05±0.15	FINISH	RSS31C-08201	
X.XX	±0.15±0.13±0.25			
X.X	±0.20±0.25±0.5	Q'TY	SCALE SHEET REV	
X.	±0.30±0.36±1.00			
ANGLE	±2°	1:1 1/2 A		