
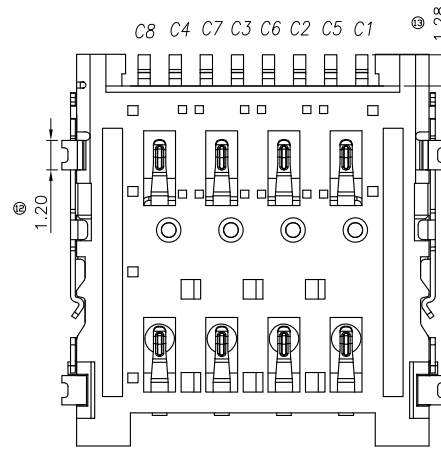
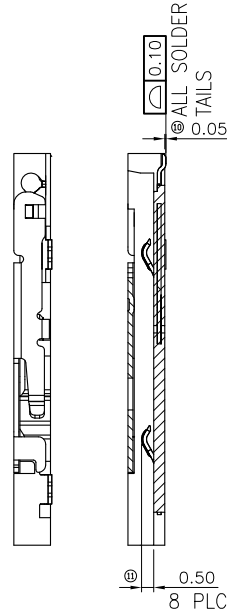


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2018.03.06		NEW	Jason
B	2020.7.2		依实物更改图纸	Jason
B1	2021.03.10	RD00321031003	更新图纸	Jason

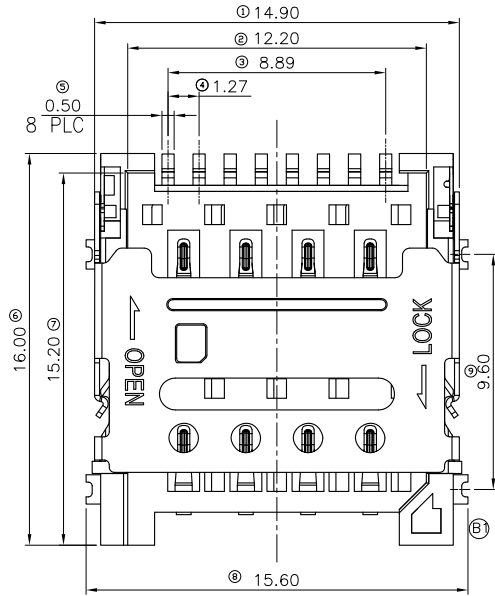



Specifications:

1.Material:


- 1.1.Housing: ThermoPlastic ,UL94V-0
- 1.2.Contact: Copper Alloy
Gold flash on over Ni.
- 1.3.SHELL: SUS , plating Ni all over

2.Electrical:

- 3.1.Current Rating: 0.5 A
 - 3.2.Contact Resistance: 80mΩ max
 - 3.3.Dielectric Withstanding Voltage: 500V AC
 - 3.4.Insulation Resistance:1000MΩ MIN
- 3.Environment characteristics:
1.Operating Temperature:-40°C~+85°C

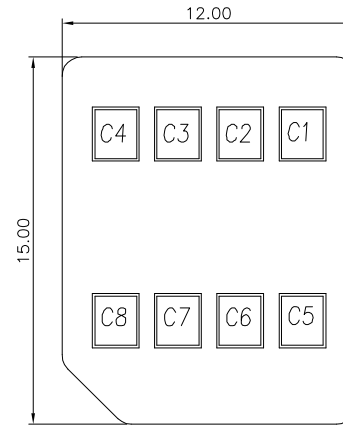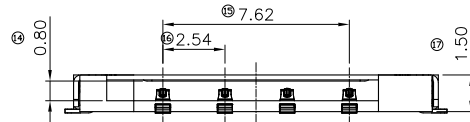

- C1: VCC
- C2: RST
- C3: CLK
- C4: RESERVED
- C5: GND
- C6: VPP
- C7: I/O
- C8: RESERVED

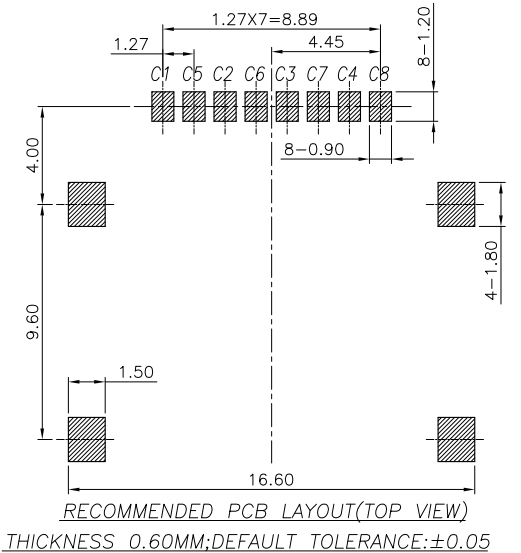

SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	I/O
C8	RESERVED

GENERAL TOLERANCE			UNITS mm
SELECT	TOL.		
ON.	1	2	MAT'L
X.XXX	±0.10	±0.15	
X.XX	±0.15	±0.20	FINISH
X.X	±0.20	±0.25	
X.	±0.25	±0.30	Q'TY
ANGLE	±2'		

NAME (INTENDED USE) 卡座
PART NO. (INTENDED USE) RSS33C-03201

	SCALE	SHEET	REV.
	1:1	1/1	B1