

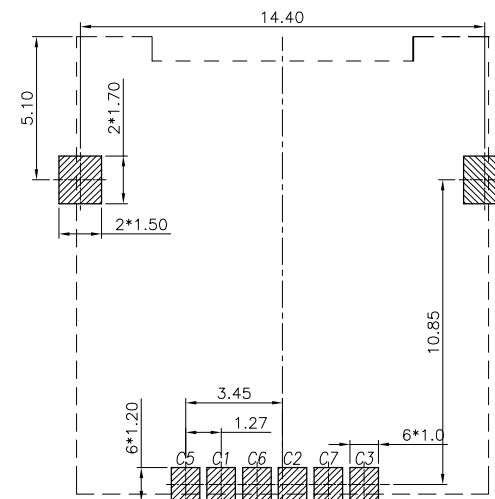
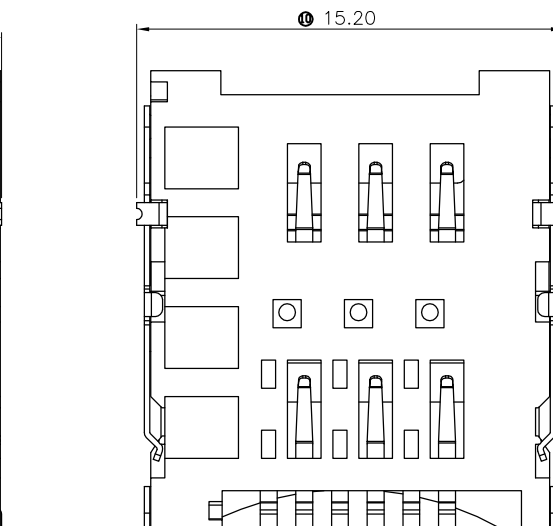


REV.	DATE	ECN. NO	MODIFY. CONTENT	APPROVER
A	2018.03.06	/	初版发行	JASON
A1	2021.02.26	RD00321022602	重新整理图面	JASON

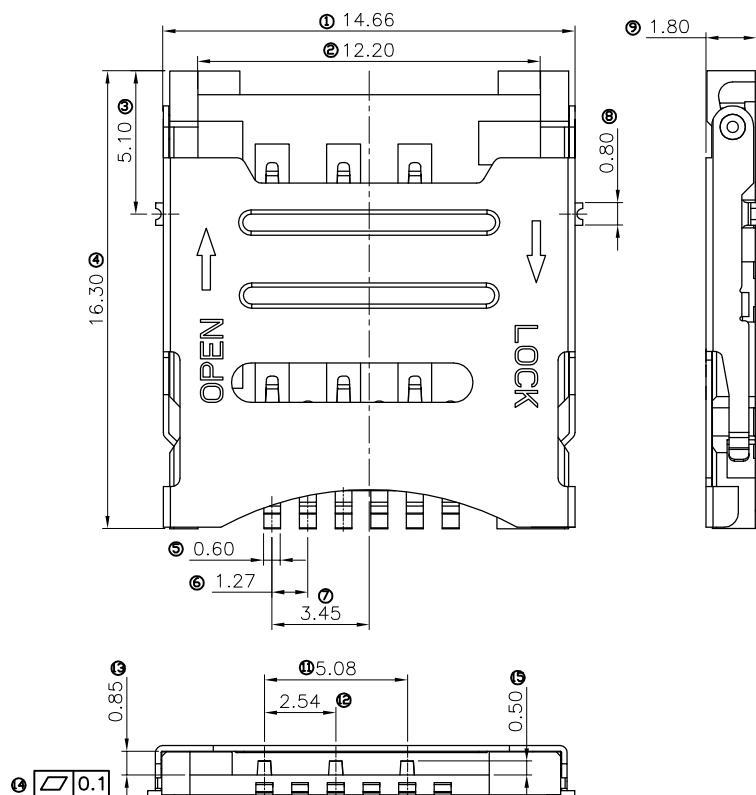

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

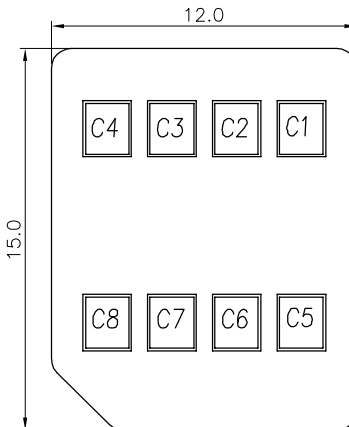

SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	I/O
C8	RESERVED

Specifications:

1.Material:

1.1.Housing: Theromplatic ,UL94V-0

1.2.Contact: Copper Alloy

Gold flash on contact area

plated sn on solder tails platd ni under all

1.3.SHELL: SUS , plating Ni all over

2.Electrical:

3.1.Current Rating: 0.5 A

3.2.Contact Resistance: 80mΩ max

3.3.Dielectric Withstanding Voltage: 500V AC

3.4.Insulation Resistance:1000MΩ MIN

3.Environment characteristics:

1.Operating Temperature:-40°C~+85°C

GENERAL TOLERANCE				UNITS	NAME (INTENDED USE)			
SELECT	✓			mm	SIM			
TOL.				MAT'L	PART NO. (INTENDED USE)			
ON.	1	2	3	FINISH	RSS36C-08201			
X.XXX		± 0.05	± 0.15	Q' TY				
X.XX	± 0.20	± 0.13	± 0.25					
X.X	± 0.30	± 0.25	± 0.50					
X.	± 0.50	± 0.38	± 1.00					
ANGLE	$\pm 2^\circ$							

	SCALE	SHEET	REV.
1:1	1/1	A1	