



**BIPOLAR TRANSISTOR (PNP)**
**FEATURES**

- Complementary to MMBT3904
- Surface Mount device


**SOT-23**

**MECHANICAL DATA**

- Case: SOT-23
- Case Material: Molded Plastic. UL flammability
- Classification Rating: 94V-0
- Weight: 0.008 grams (approximate)

**MAXIMUM RATINGS (T<sub>A</sub> = 25°C unless otherwise noted)**

Parameter	Symbol	Value	Unit
Collector-Base Voltage	V <sub>CBO</sub>	-40	V
Collector-Emitter Voltage	V <sub>CEO</sub>	-40	V
Emitter-Base Voltage	V <sub>EBO</sub>	-5	V
Collector Current	I <sub>C</sub>	-200	mA
Collector Power Dissipation	P <sub>C</sub>	200	mW
Thermal Resistance From Junction To Ambient	R <sub>θJA</sub>	625	°C/W
Junction Temperature	T <sub>J</sub>	150	°C
Storage Temperature	T <sub>STG</sub>	-55 ~+150	°C

**ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise specified)**









Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Collector-base breakdown voltage	V <sub>(BR)CBO</sub>	-40			V	I <sub>C</sub> =-10uA, I <sub>E</sub> =0
Collector-emitter breakdown voltage	V <sub>(BR)CEO</sub>	-40			V	I <sub>C</sub> =-1mA, I <sub>B</sub> =0
Emitter-base breakdown voltage	V <sub>(BR)EBO</sub>	-5			V	I <sub>E</sub> =-10uA, I <sub>C</sub> =0
Collector cut-off current	I <sub>CBO</sub>			-0.1	uA	V <sub>CB</sub> =-40V, I <sub>E</sub> =0
Collector cut-off current	I <sub>CEX</sub>			-50	nA	V <sub>CE</sub> =-30V, V <sub>BE(OFF)</sub> =-3V
Emitter cut-off current	I <sub>EBO</sub>			-0.1	uA	V <sub>EB</sub> =-5V, I <sub>C</sub> =0
DC current gain	h <sub>FE1</sub>	100		300		V <sub>CE</sub> =-1V, I <sub>C</sub> =-10mA
	h <sub>FE2</sub>	60				V <sub>CE</sub> =-1V, I <sub>C</sub> =-50mA
	h <sub>FE3</sub>	30				V <sub>CE</sub> =-2V, I <sub>C</sub> =-100mA
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>			-0.3	V	I <sub>C</sub> =-50mA, I <sub>B</sub> =-5mA
Base-emitter saturation voltage	V <sub>BE(sat)</sub>			-0.95	V	I <sub>C</sub> =-50mA, I <sub>B</sub> =-5mA
Transition frequency	f <sub>T</sub>	300			MHz	V <sub>CE</sub> =-20V, I <sub>C</sub> =-10mA, f=100MHz
Delay time	t <sub>d</sub>			35	ns	V <sub>CC</sub> =-3V, V <sub>BE(OFF)</sub> =-0.5V, I <sub>C</sub> =-10mA, I <sub>B1</sub> =I <sub>B2</sub> =-1mA
Rise time	t <sub>r</sub>			35	ns	
Storage time	t <sub>s</sub>			225	ns	V <sub>CC</sub> =-3V, I <sub>C</sub> =-10mA
Fall time	t <sub>f</sub>			75	ns	I <sub>B1</sub> =I <sub>B2</sub> =-1mA

**CLASSIFICATION OF h<sub>FE</sub>**

Rank	L	H
Range	100-200	200-300
Marking	2A	


**BIPOLAR TRANSISTOR (PNP)**

**Typical Characteristics**

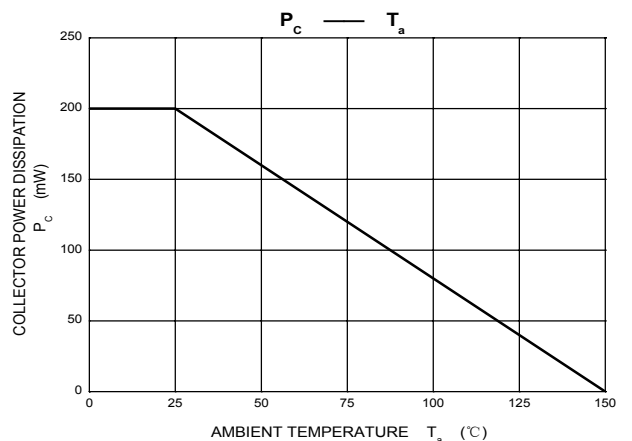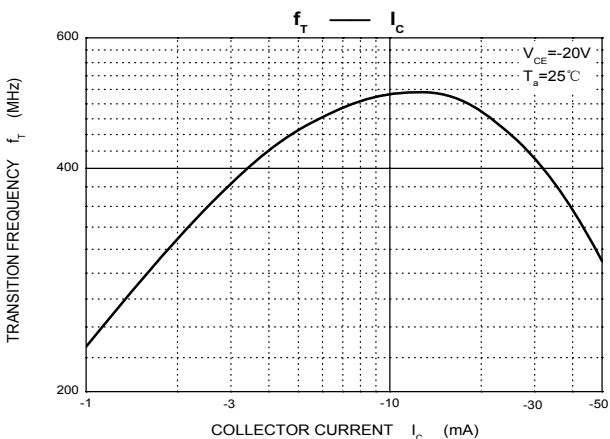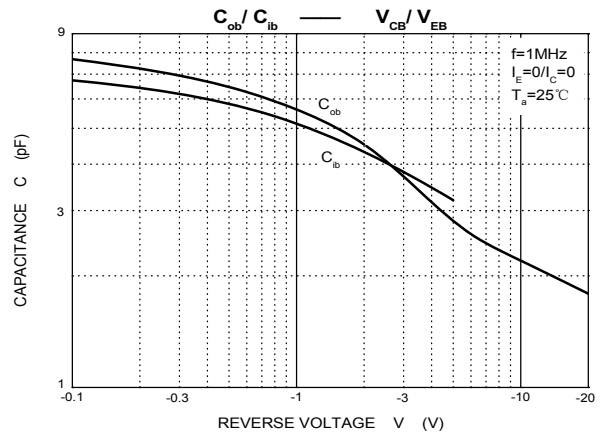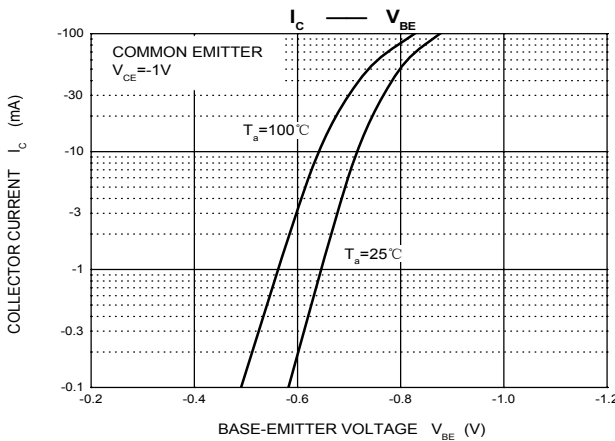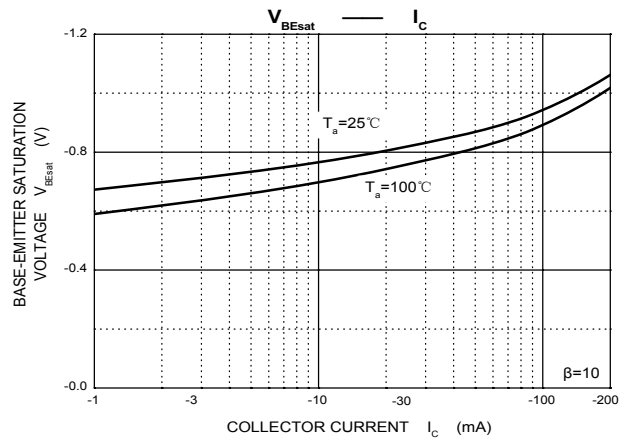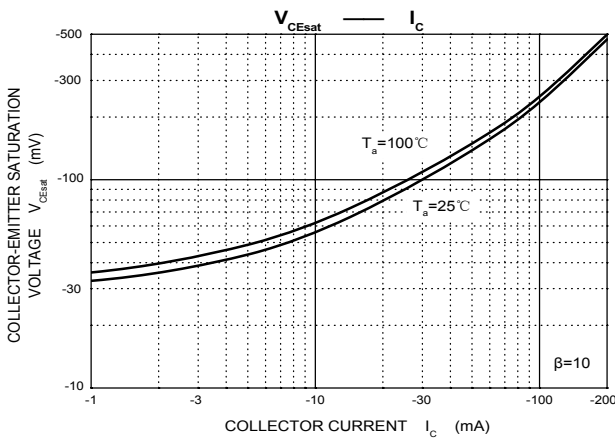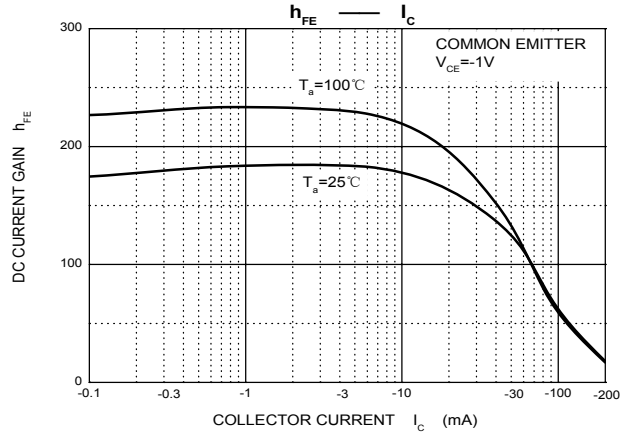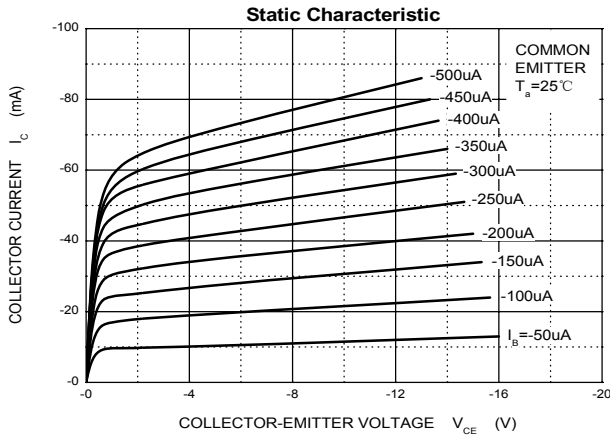


**BIPOLAR TRANSISTOR (PNP)**

**SOT-23 Package Outline Dimensions**

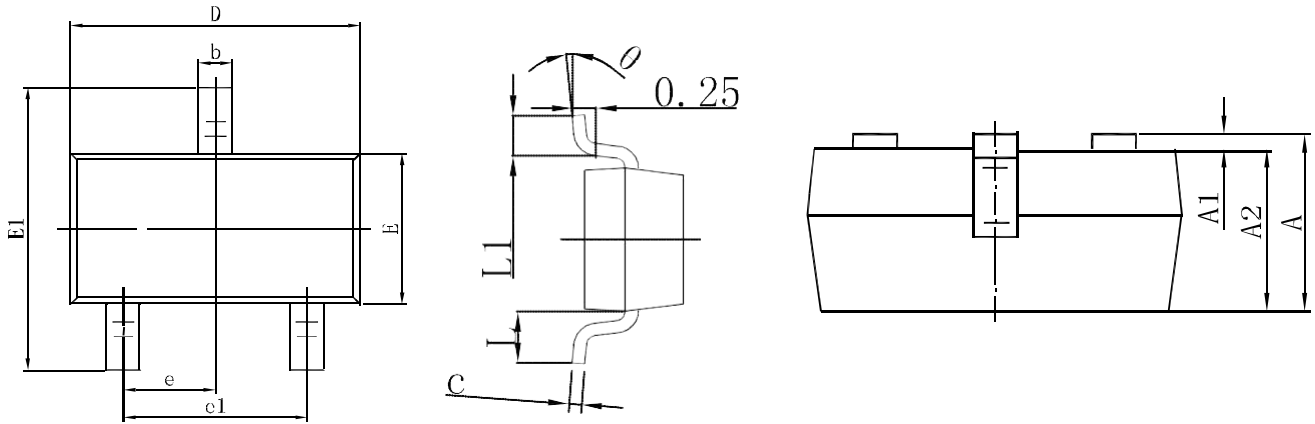

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

**SOT-23 Suggested Pad Layout**

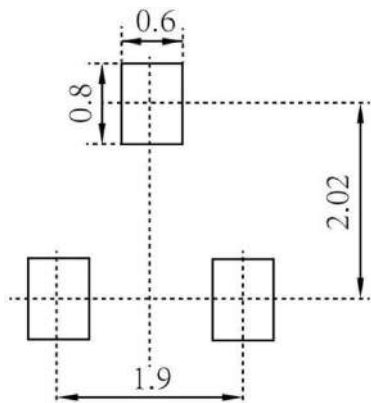


**Note:**

1. Controlling dimension: in millimeters
2. General tolerance:  $\pm 0.05\text{mm}$
3. The pad layout is for reference purposes only

**BIPOLAR TRANSISTOR (PNP)**


**SOT-23 Tape and Reel**

**SOT-23 Embossed Carrier Tape**

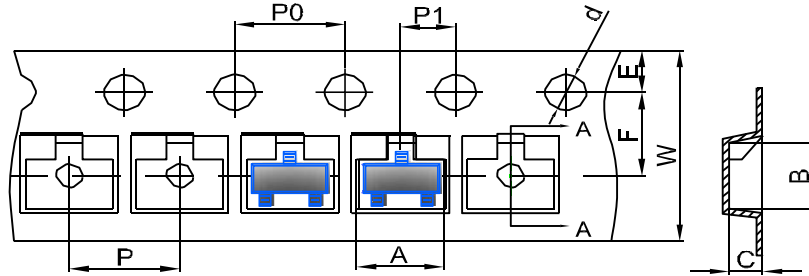


DIMENSIONS ARE IN MILLIMETER										
TYPE	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00
TOLERANCE	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1

**SOT-23 Tape Leader and Trailer**

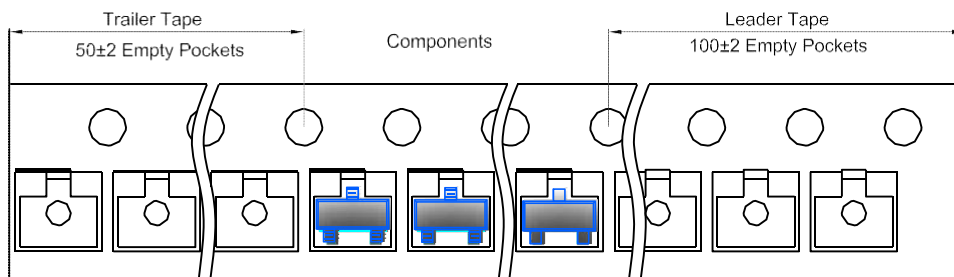

**SOT-23 Reel**

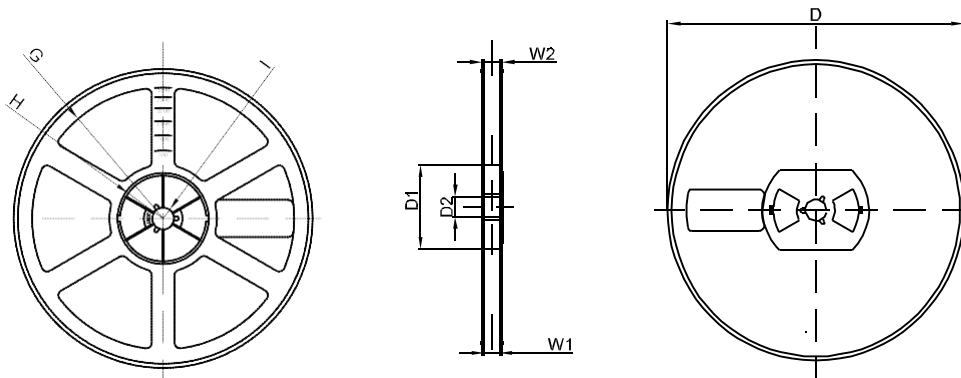

DIMENSIONS ARE IN MILLIMETER								
REEL OPTION	D	D1	D2	G	H	I	W1	W2
7" DIA	Ø178	54.40	13.00	R78	R25.60	R6.50	9.50	12.30
TOLERANCE	±2	±1	±1	±1	±1	±1	±1	±1