


All Pages Of This Edition Approved

Signature: _____ Date: _____

REV.	DESCRIPTION	REVISER	DATE
A0	新出图	luojinwei	2013.08.13
A1	MODIFY BACKLIGHT AND FPC STRUCTURE	luojinwei	2013.08.21

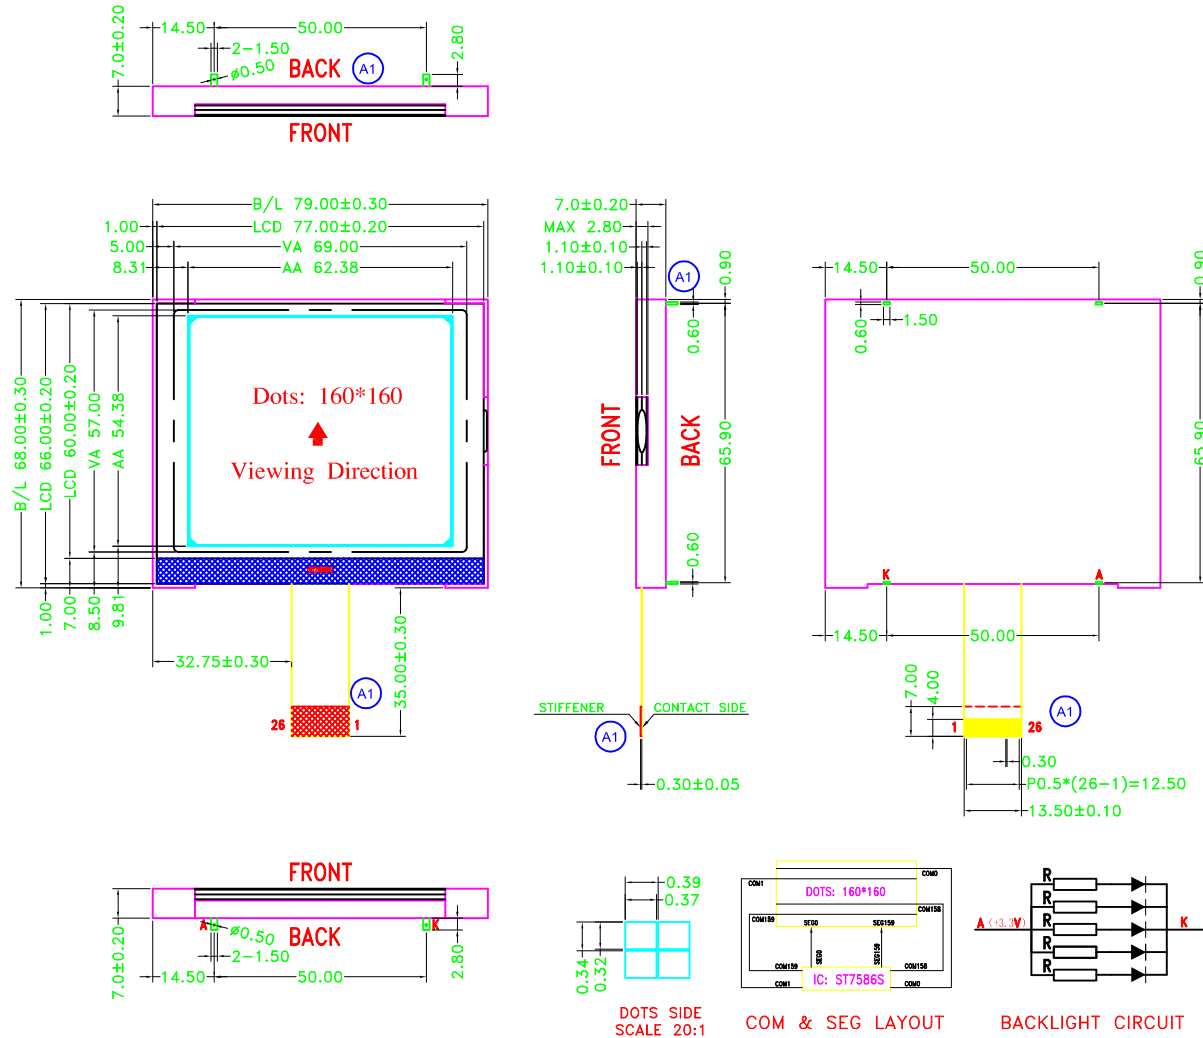

PIN	SYMBOL
1	ESD
2	A0
3	RWR
4	D0
5	D1
6	D2
7	D3
8	D4
9	D5
10	D6
11	D7
12	ERD
13	RSTB
14	IF1
15	IF2
16	IF3
17	CSB
18	VDD1
19	VD1
20	VSS
21	VDD
22	VM
23	VO
24	XV0
25	VG
26	ESD

- Specifications:
1. Display Mode: STN/Gray, Transflective/Positive.
 2. Viewing Angle: 6 0'clock.
 3. Drive Method: 1/160 Duty 1/12 Bias, Vop= 16.0V, Vdd= 3.3V.
 4. Top: -20°C~+70°C, Tst: -30°C~+80°C.
 5. Connector: COG+FPC.
 7. Drive IC: ST7586S
 8. Backlight: 5 PCS WHITE LED Backlight, If<100mA & Vf=3.3±0.1V
CHROMATICITY COORDINATES: X=0.24~0.285, Y=0.24~0.30
Luminance: 100 cd/m2(ON LCD INTERFACE), Uniformity: 80%
 9. RoHS Compliant: Yes.
 10. With " * " Mark Dimensions Are Important Dimensions.