



## **KBQ-02C 气动开关**

(KBQ-02C PNEUMATIC SWITCH)

### 一般事项

### General

□此规格适用于家用电器

- This specification applies to household appliances

□使用温度范围: -10℃~95℃

-Operating temperature: -10℃~95℃

### 特点

### Features

□接触可靠, 触动灵敏

- Contact is reliable, contact sensitive


### 用途

### Applications

□吸尘器负压的设备

- Vacuum cleaner and other negative pressure equipment

### 外形图及安装尺寸 OOUTLINE DRAWING

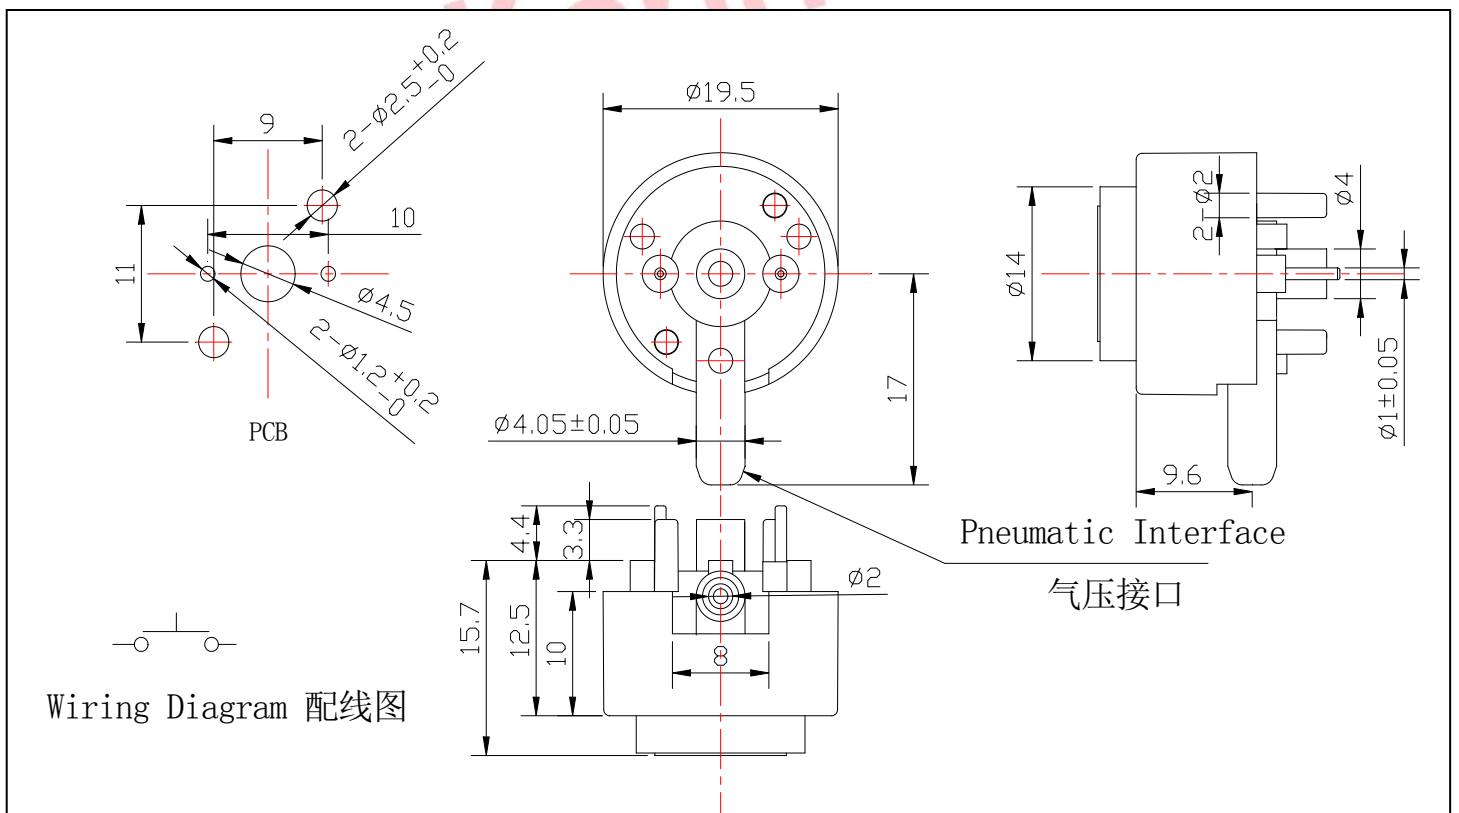



性能说明 CHARACTERISTICS

项目 ITEM		规格 SPECIFICATION
电气性能 Electrical Characteristics	功率参数 Power Parameters	AC250V,20mA
	开关接触电阻 Switch contact resistance	$\leq 50\text{m}\Omega$
	开关触点形式 Switch contact form	Unipolar control normally open 单极控制, 常开
	工作温度 Temp Range	$-10^{\circ}\text{C} \sim 95^{\circ}\text{C}$
	电气寿命 Electrical life	10,000 cycles
	抗电强度 Dielectric	AC500V,1minute
	绝缘电阻 Insulation Resistance	More than $100\text{M}\Omega$ at DC250V
机械性能 Mechanical Characteristics	压力范围 Pressure range	0.5Kpa-80Kpa (Adjustable 可调)
	适用气压: Applicable pressure	Negative Pressure 负气压
焊接 Soldering		Hand soldering $T \leq 300^{\circ}\text{C}$ : $t \leq 5\text{s}$