


SMD POWER INDUCTORS

SGA43 Series

Type	Inductance (μ H)	DCR (Ω Max)	DCI (mA Max)	S. R. F Min
SGA43-1R0M	1.0	0.045	3.50	7.96MHz
SGA43-1R4M	1.4	0.055	2.85	
SGA43-1R8M	1.8	0.06	2.80	
SGA43-2R2M	2.2	0.07	2.40	
SGA43-2R7M	2.7	0.075	2.30	
SGA43-3R3M	3.3	0.085	2.25	
SGA43-3R9M	3.9	0.09	1.70	
SGA43-4R7M	4.7	0.105	1.65	
SGA43-5R6M	5.6	0.12	1.60	
SGA43-6R8M	6.8	0.12	1.40	
SGA43-8R2M	8.2	0.14	1.30	
SGA43-100M	10	0.18	1.10	2.52MHz
SGA43-120M	12	0.21	1.00	
SGA43-150M	15	0.235	0.85	
SGA43-180M	18	0.33	0.80	
SGA43-220M	22	0.36	0.70	
SGA43-270M	27	0.52	0.65	
SGA43-330M	33	0.54	0.60	
SGA43-390M	39	0.58	0.55	
SGA43-470M	47	0.84	0.48	
SGA43-560M	56	0.93	0.46	
SGA43-680M	68	1.11	0.44	

SHAPES & DIMENSIONS (unit: mm)

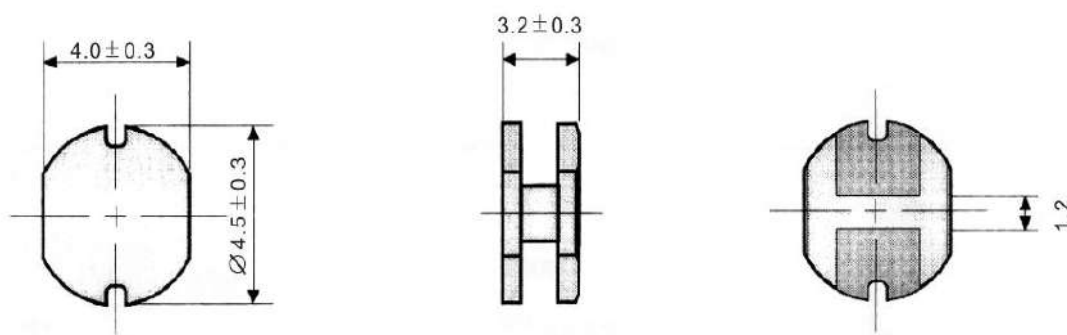

There is no products you want above?




Support customization !!!

SMD POWER INDUCTORS

SGA54 Series

Type	Inductance (μ H)	DCR (Ω Max)	DCI (mA Max)	S. R. F Min
SGA54-100M	10	0.10	1.65	2.52MHz
SGA54-120M	12	0.12	1.55	
SGA54-150M	15	0.14	1.40	
SGA54-180M	18	0.15	1.25	
SGA54-220M	22	0.18	1.10	
SGA54-270M	27	0.20	0.95	
SGA54-330L	33	0.22	0.90	
SGA54-390L	39	0.30	0.80	
SGA54-470L	47	0.35	0.75	
SGA54-560K	56	0.40	0.70	
SGA54-680K	68	0.45	0.65	
SGA54-820K	82	0.60	0.60	
SGA54-101K	100	0.70	0.55	1 KHz
SGA54-121K	120	0.85	0.45	
SGA54-151K	150	1.10	0.43	
SGA54-181K	180	1.35	0.40	
SGA54-221K	220	1.55	0.35	

SHAPES & DIMENSIONS (unit: mm)

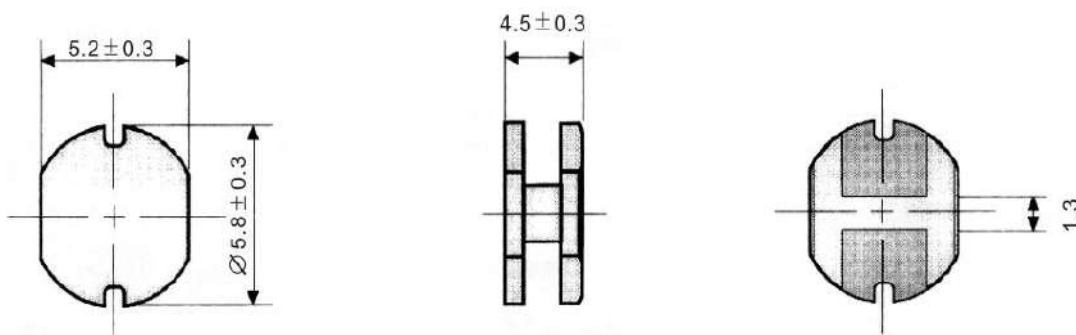

There is no products you want above?




Support customization !!!

SMD POWER INDUCTORS

SGAT4 Series

Type	Inductance (uH)	DCR (Ω Max)	DCI (mA Max)	S. R. F Min
SGAT4-100M	10	0.05	2.90	2.52MHz
SGAT4-120M	12	0.06	2.80	
SGAT4-150M	15	0.07	2.30	
SGAT4-180M	18	0.08	2.15	
SGAT4-220M	22	0.09	2.10	
SGAT4-270M	27	0.10	1.90	
SGAT4-330L	33	0.12	1.85	
SGAT4-390L	39	0.15	1.45	
SGAT4-470L	47	0.17	1.35	
SGAT4-560K	56	0.20	1.30	
SGAT4-680K	68	0.22	1.20	
SGAT4-820K	82	0.25	1.00	
SGAT4-101K	100	0.30	0.95	1KHz
SGAT4-121K	120	0.40	0.90	
SGAT4-151K	150	0.50	0.80	
SGAT4-181K	180	0.62	0.70	
SGAT4-221K	220	0.72	0.65	
SGAT4-271K	270	0.95	0.57	
SGAT4-331K	330	1.10	0.55	
SGAT4-391K	390	1.20	0.50	
SGAT4-471K	470	1.52	0.45	
SGAT4-561K	560	1.90	0.40	

SHAPES & DIMENSIONS (unit: mm)

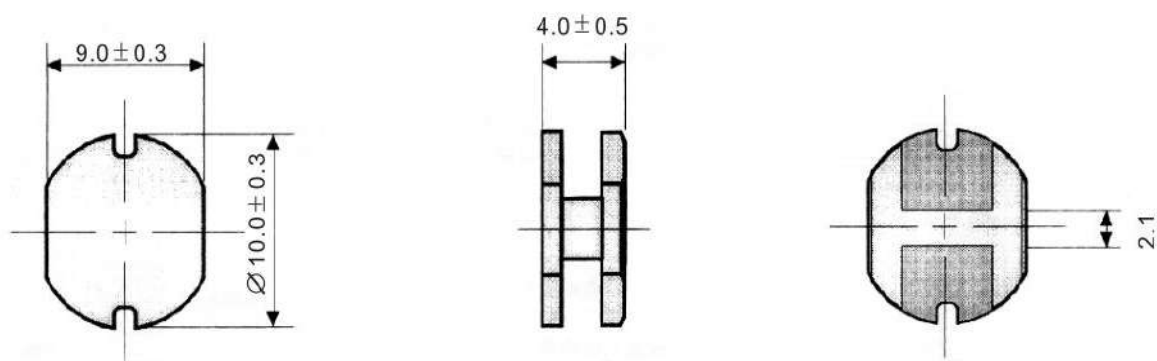

There is no products you want above?






Support customization !!!

SMD POWER INDUCTORS

SGAT5 Series

Type	Inductance (uH)	DCR (Ω Max)	DCI (mA Max)	S. R. F Min
SGAT5-100M	10	0.06	3.80	2.52MHz
SGAT5-120M	12	0.07	3.40	
SGAT5-150M	15	0.08	2.90	
SGAT5-180M	18	0.09	2.65	
SGAT5-220M	22	0.10	2.50	
SGAT5-270M	27	0.11	2.25	
SGAT5-330L	33	0.12	2.00	
SGAT5-390L	39	0.13	1.90	
SGAT5-470L	47	0.15	1.70	
SGAT5-560K	56	0.19	1.60	
SGAT5-680K	68	0.22	1.45	
SGAT5-820K	82	0.25	1.30	
SGAT5-101K	100	0.33	1.15	1 KHz
SGAT5-121K	120	0.40	1.00	
SGAT5-151K	150	0.45	0.95	
SGAT5-181K	180	0.60	0.85	
SGAT5-221K	220	0.70	0.75	
SGAT5-271K	270	0.95	0.70	
SGAT5-331K	330	1.10	0.60	
SGAT5-391K	390	1.20	0.55	
SGAT5-471K	470	1.45	0.50	
SGAT5-561K	560	1.90	0.48	
SGAT5-681K	680	2.25	0.45	
SGAT5-821K	820	2.50	0.40	

SHAPES & DIMENSIONS (unit: mm)

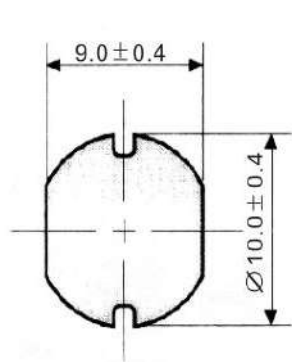

There is no products you want above?



Support customization !!!